


CT4058

Compact Tractors Specifications

Dimensions

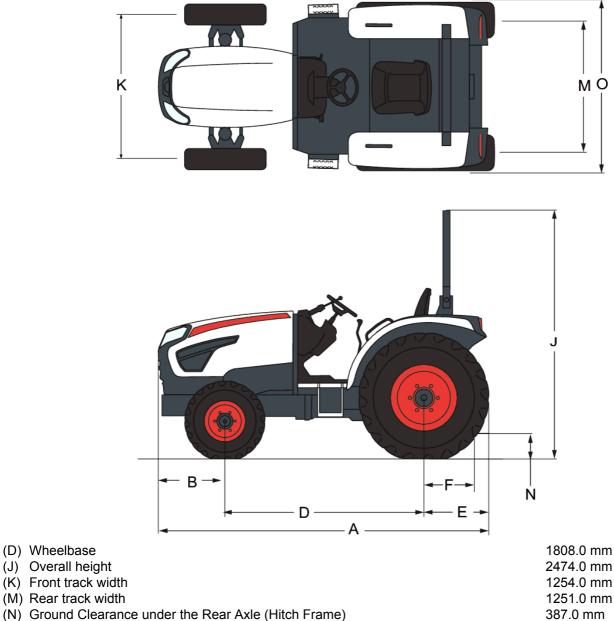

- (O) Overall Width
- (Wt.)Weight with ROPS

2474.0 mm 1254.0 mm 1251.0 mm 387.0 mm 1702.0 mm 1619 kg



CT4058

Compact Tractors Specifications

Standard Features

- 4 Wheel Drive
- Tilt Steering
- Quick turn
- · Rear folding ROPS
- PTO Cover
- Stationary PTO
- Auto PTO
- · Draft Control
- Front Hitch
- · Fuel Heater
- PTO Cruise
- 7 Pin Socket
- 12V Aux
- · Beacon Ready Wiring
- Horn
- **Rear View Mirror** •
- Cup holder
- OPC
- SMV sign
- Floor mat
- Toolbox

Engine

Engine type

Fuel Diesel Displacement 1.80 L Max Torque 187.0 Nm Gross Power (ECE-R120) 57.7 HP 55.7 HP Net Power Rated revolution 2600.0 RPM Alternator 12V/75A Air Cleaner Dry type, replaceable Fuel tank 45.00 L

Drive Train

Transmission Shuttle Type Hand clucth Max. Travelling Speed Forward Max. Travelling Speed Reverse Steering Turning radius(w/brake) Brake type Mechanical differential lock Front wheel drive system

3 cylinder, water cooled, 4 cycle, Vertical In-Line Common Rail Direct Injection (CRDI)

Manual, 16F/16R **H-Shuttle** Standard 32.8 km/h 32.0 km/h Hydrostatic Power Steering 2640.0 mm Wet disc type Rear Std. Hydraulic multi disc Clutch



CT4058

Compact Tractors Specifications

Hydraulic System	
Implement Pump Power steering pump Total hydraulic flow No.of Std. remote valve's ports (Rear)	36.40 L/min 18.70 L/min 55.10 L/min Std. (4 port)
Hitch	
Check Link type (Manual Transmission) Top Link type Lift rod type @lift point (Horizontal position) Lift capacity at lift point Lift capacity at 610 mm (24 in.) behind lift point Drawbar type Max. Drawbar vertical load Max. Trailer loading weight	Turn-buckle Turn-buckle 1707 1417 kg 1467 kg Bar(Clevis) 750 kg 4300 kg
РТО	
Max PTO Power Rear PTO Rear PTO type Rear PTO speed	48.0 HP SAE 1-3/8, 6 Spline Independent 540/540E RPM
Capacity (Other)	
Engine crankcase(included filter) Coolant Transmission case Support of front axle	7.40 L 3.30 L 43.00 L 5.60 L
Tires	
Agriculture Tires Turf tires Industrial Tires	Front: 8-16 R1 / Rear: 13.6-24 R1 Front: 29x12.5-15NHS R3 / Rear: 44x18.0-20 R3 Front: 10-16.5 (124 A2) / Rear: 17.5L-24 R4